



PICKERING'S LIFTS  
LOADING SYSTEMS



# DYNACO M2 EMERGENCY

**Push-Pull**  
gear driven technology



inside door

[www.dynacodoor.com](http://www.dynacodoor.com)



# DYNACO M2 EMERGENCY

The Dynaco M2 Emergency Exit is designed for inside applications with intensive use, combined with an emergency exit. An ingenious T-shaped cut in the middle of the curtain allows the two symmetric “flaps” to release an emergency exit, simply by pushing on the indicated spot. The absence of rigid elements in the curtain and the soft bottom edge make the Dynaco M2 Emergency Exit intrinsically safe.

- **HIGH SPEED OPERATION:**  
Up to 1,2 m/s
- **PATENTED “PUSH PULL” TECHNOLOGY:**  
Unique door drive system.
- **GOOD SEAL:**  
Patented side frame assembly. Neither blade nor brush systems required.
- **USER SAFETY:**  
Flexible curtain without rigid elements. Integrated emergency escape system.
- **COMFORT OF USE:**  
DYNACO wireless detector at the bottom.
- **ADVANCED DRIVE:**  
Frequency driven motor and encoder for smooth operation. Wearable elements are reduced to a minimum.
- **DYNALOGIC CONTROL BOX:**  
User-friendly control box with self-diagnosis.
- **CONFORM TO EN13241-1**


Opening by pushing on the emergency release spots



Emergency exit open



“PUSH-PULL<sup>PT</sup>” drive technology

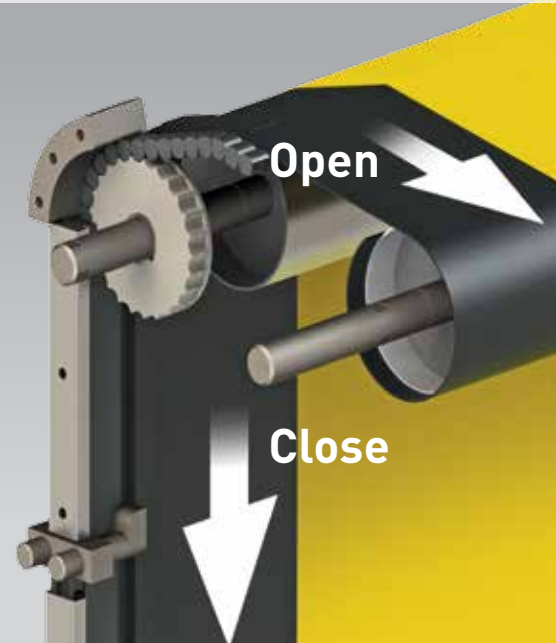

# Push-Pull

gear driven technology



























inside door

## EN13241-1 STANDARDS


Standard	Ref.	Test acc.	Results
<b>Water permeability</b>	EN 12425	EN 12489	Class 1
<b>Wind load</b>	EN 12424	EN 12444	Class 1*
<b>Wind permeability</b>	EN 12426	EN 12427	Class 0
<b>Safe openings</b>	EN 12453	EN 12445	Pass
<b>Mechanical resistance</b>	EN 12604	EN 12605	Pass
<b>Unintended movements</b>	EN 12604	EN 12605	Pass
<b>Thermal transmittance</b>	EN 12428	EN 12428	6,02 W/m <sup>2</sup> K
<b>Performance (cycles)</b>	EN 12604	EN 12605	1.000.000

\* Interior applications only.

## CHARACTERISTICS

<b>Max. dimensions</b>	W 5.500 mm x H 5.500 mm																
<b>Min. dimensions</b>	W 1.000 mm x H 2.200 mm																
<b>Opening speed</b> <b>Closing speed</b>	Up to 1,2 m/s 0,6 m/s																
<b>Structure</b>	Galvanised steel: 80 x 40 x 3 mm. Option: stainless steel.																
<b>Drum</b>	Steel - Ø 102 x 2 mm.																
<b>Side guides</b>	Reinforced polyethylene (PE-UHMW1000) on springs																
<b>Motor</b>	4 poles, without brake. Power 1,5 kW IP rating: IP 65																
<b>Control box</b>	DYNALOGIC provided with: circuit breaker, general divider, Adjustable timer, push button for opening and reset and emergency stop. IP rating: IP 54. Frequency inverter.																
<b>Standard detectors</b>	Infrared barrier: 300 mm from the floor. Wireless DYNACO detector (WDD).																
<b>Power supply</b> <b>Frequency</b>	Single phase 230V - 18 A Frequency: 50-60 Hz																
<b>Available colours</b> comparable with:	<table border="0"> <tbody> <tr> <td>Yellow RAL1003</td> <td></td> <td>Green RAL6005</td> <td></td> </tr> <tr> <td>Orange RAL2004</td> <td></td> <td>Grey RAL7035</td> <td></td> </tr> <tr> <td>Red RAL3000</td> <td></td> <td>White RAL9010</td> <td></td> </tr> <tr> <td>Blue RAL5002</td> <td></td> <td>Black RAL9005</td> <td></td> </tr> </tbody> </table>	Yellow RAL1003		Green RAL6005		Orange RAL2004		Grey RAL7035		Red RAL3000		White RAL9010		Blue RAL5002		Black RAL9005	
Yellow RAL1003		Green RAL6005															
Orange RAL2004		Grey RAL7035															
Red RAL3000		White RAL9010															
Blue RAL5002		Black RAL9005															
(Actual colours may deviate. Colour samples available upon request)																	

## Side guide view

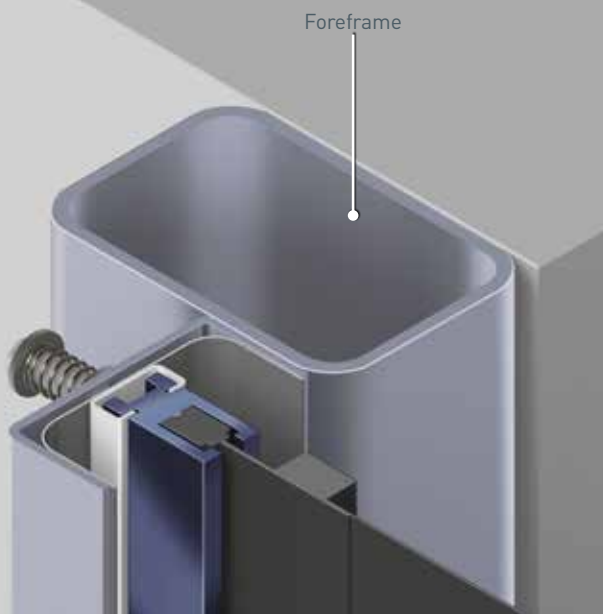

## Lateral driving strap view

